



# KK / TK

## Coupling Capacitors



The coupling capacitors of the series KK or TK (and 9230) consist of 1 or more modular units, built into glass fibre reinforced epoxy tubes. Their applications are:

- providing a base load for high voltage AC resonant test systems (KK only).
- the separation of the partial discharge signal from the high voltage.
- measuring AC voltages in the industrial frequency range.
- attenuating interferences coming from the HV side (together with a HV inductance, KK only)

The standard base frame is fitted with castors for mobility (above 100 kV). They are built for indoor use.

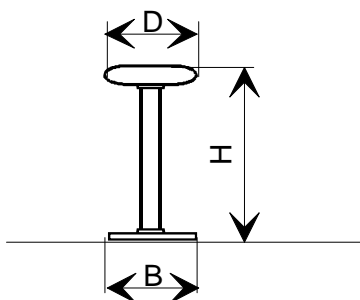


Fig. A

The above listed TK capacitors can also be fitted with a double toroid electrode if they shall be used with big HV connections or act as HV filters. They become then KKs or KKF.

Please contact us for details in this case.

### HIGH VOLTAGE FILTER FOR KK SERIES (OPTION)

By adding an inductance to the coupling capacitor, they form the high voltage filter KKF, which attenuates interferences coming from the high voltage reactor / transformer side.

The high voltage filter inductance is connected between the reactor / transformer and the coupling capacitor or between two coupling capacitors.

Following inductances are available:

Type	Inductivity Y mH	Max. current A	Weight kg	Capacity of KK nF
F 600-2	600	2	3	< 1
F 350-8	350	8	33	< 5
F 70-8	70	8	20	$5 \leq C \leq 10$
F 30-50	30	50	100	> 10
F 70-50	70	50	150	$5 \leq C < 10$
F 50-90	50	90	250	> 10



Examples of HV filter configurations.

**TECHNICAL DATA OF KK SERIES**

Type KK	Voltage kV	Capacit y nF	PD Level at Un pC	Type	Height H mm	Diameter top electrode D mm	Base frame dimension B mm	Weight net, approx. kg
75-25	75	25	≤ 1	B	1900	660	1200	110
150-10	150	10	≤ 1	B	2600	660	1500	180
250-10	250	10	≤ 1	B	2600	660	1500	180
300-1	300	1	≤ 1	B	2600	660	1500	150
300-2	300	2	≤ 1	B	2600	660	1500	180
300-4	300	4	≤ 1	B	3200	660	1500	220
400-1	400	1	≤ 2	B	3300	1580	1500	270
400-2	400	2	≤ 2	B	3300	1580	1500	270
400-4	400	4	≤ 2	B	3300	1580	1500	270
400-7	400	7	≤ 2	B	3300	1580	1500	270
400-10	400	10	≤ 2	B	4200	1580	1500	300
500-5	500	5	≤ 3	C	4600	1900	2100	490
600-1	600	1	≤ 3	C	4600	1900	2100	490
600-2	600	2	≤ 3	C	5800	1900	2100	560
800-0.5	800	0.5	≤ 5	C	6000	1900	3100	650
800-1	800	1	≤ 5	C	6000	1900	3100	650
800-3.5	800	3.5	≤ 5	C	6000	1900	3100	650

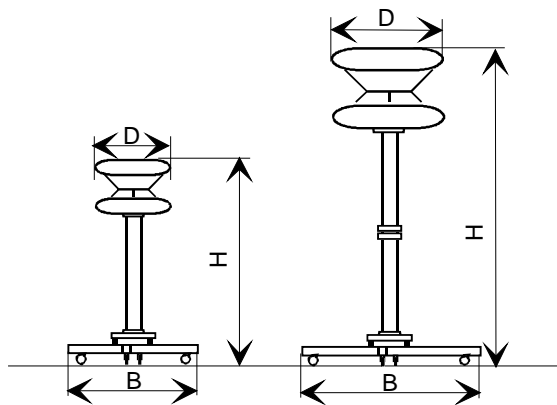


Fig. B

Fig. C



Examples of HV filter configurations.

**TECHNICAL DATA OF TK SERIES**

Type TK	Voltage kV	Capacit y nF	PD Level at Un pC	Type	Height H mm	Diameter top electrode D mm	Base frame dimension B mm	Weight net approx. kg
50-1	50	1	≤ 1	A	500	220	350	13
100-1	100	1	≤ 1	A	720	300	350	15
100-10	100	10	≤ 1	A	740	300	350	30
200-1	200	1	≤ 1	A	1640	350	850	60
300-1	300	1	≤ 1	A	1860	600	850	80
400-1	400	1	≤ 2	A	2400	820	850	90

Typical insertion loss (50 Ω / 50 Ω) at 40 kHz - 400 kHz:

≥20dB

a brand of

**HAEFELY** 



Haefely is a subsidiary  
of Hubbell Incorporated.





Special HV filter inductance configuration

## MEASURING OF PARTIAL DISCHARGES

By adding a coupling quadripole (option), the coupling capacitor can be used for measuring partial discharges. Coupling quadripoles type TE AKV, AKV 568, 9232, etc. can be used. Other manufacturers' coupling impedances can be used also. Please see electrical diagram.




Digital partial discharge detector type DDX 9101.

## MEASURING OF AC VOLTAGES

The secondary unit type SEK AC (option) with standard output voltage 140 V RMS is used for voltage measurements with a DMI 551 or with a control unit OT 247 and OT 257.

The formed high voltage AC divider will measure in a frequency range of 10 ... 1000 Hz with an accuracy of  $\pm 0.5$  %.

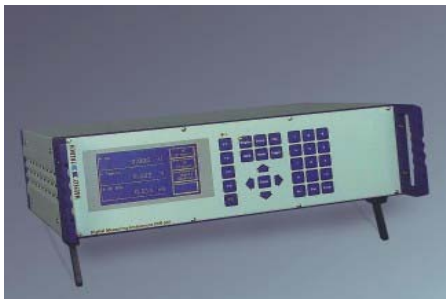

Digital Measuring Instrument type DMI 551

## COLOURS

Insulating parts	grey-white RAL 9002
Top electrode	aluminium

## BASIC SCOPE OF SUPPLY

- High voltage coupling capacitor unit(s)
- Mobile base frame
- Top electrode
- Struts if required

## CALIBRATION

Our basic standard for calibrating each coupling capacitor is a PTB (Germany) calibrated internal standard. A HV divider should be re-calibrated every year. Haefely Test AG can provide these services, in our Basel works or on-site.

## ROUTINE TESTS IN THE FACTORY

Normally, the capacitance,  $\tan \delta$ , and partial discharge values are tested before and after the  $1,1 U_n$  over-voltage test.

## TRANSPORTATION

Usually, the capacitors having a rated voltage of less than 200 kV are shipped assembled and are therefore ready for immediate use.

For higher voltages the coupling capacitor must be assembled on-site.

## ACCESSORIES (NOT INCLUDED)


- Set of HV connections
- Secondary part for voltage measurements
- Coupling quadripole for Partial Discharge measurements

## SPECIAL VERSIONS

- Outdoor version with porcelain insulator

**TYPICAL ELECTRICAL DIAGRAM OF COUPLING CAPACITOR**

**Coupling Capacitor with HV Filter**    Injection Capacitor    Standard Capacitor

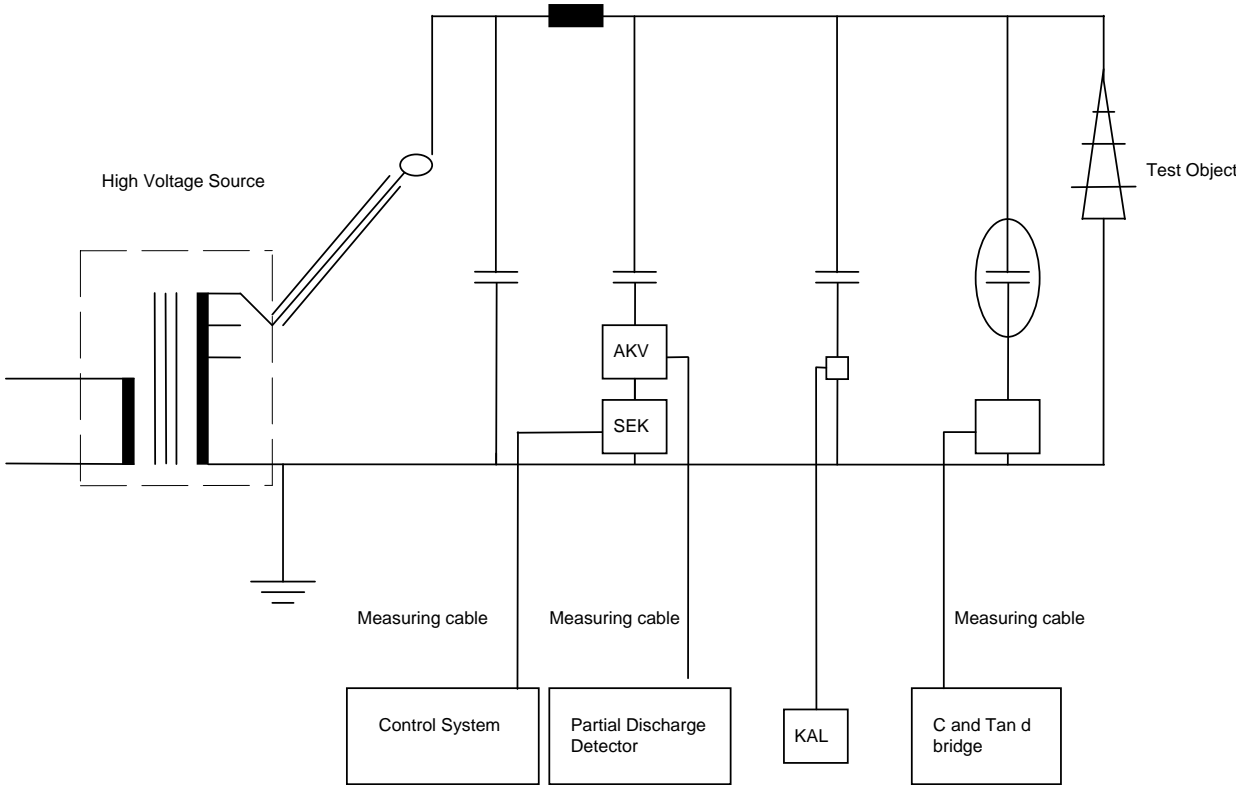

If the coupling capacitor is used simultaneously for voltage and PD measurements, the coupling quadripole & secondary part are to be connected as shown above.

[www.haefely.com](http://www.haefely.com)

**Europe, Asia, South & Central America, Australia**  
Haefely Test AG  
Birsstrasse 300  
4052 Basel  
Switzerland  
☎ + 41 61 373 4111  
☎ + 41 61 373 4912  
✉ [sales@haefely.com](mailto:sales@haefely.com)

**China (Sales & Service Office)**  
Haefely Test AG – Beijing Office  
8-1-602, Fortune Street  
No. 67, Chaoyang Road, Chaoyang District  
Beijing, 100025  
P. R. China  
☎ + 86 10 8578 8099  
☎ + 86 10 8578 9908  
✉ [sales@haefely.com.cn](mailto:sales@haefely.com.cn)

**North America**  
Hipotronics Inc.  
1650 Route 22  
PO Box 414  
Brewster, NY 10509  
USA  
☎ + 1 845 279 3644  
☎ + 1 845 279 2467  
✉ [sales@hipotronics.com](mailto:sales@hipotronics.com)